



## FEED CONTROL VALVES

### UCF1G-01 / 03 / 04 (1/8, 3/8, 1/2)

### UCF2G-03 / 04 (3/8, 1/2)


### Gasket Mounting

## FLOW CONTROLS

### Specifications / Model Number Designation

**Up to 14 MPa (2030 PSI), 80 L/m in (21.1 U.S.GPM)**

These valves are the combination of flow control valve, a deceleration valve and a check valve and used mainly for controlling rapid traverse and feed cycles machine tools. Switching from rapid traverse to feed is made by a cam operation, and fine feed control is accomplished by dial rotation regardless of pressure and oil temperature variation. Rapid return is free of cam actuation.

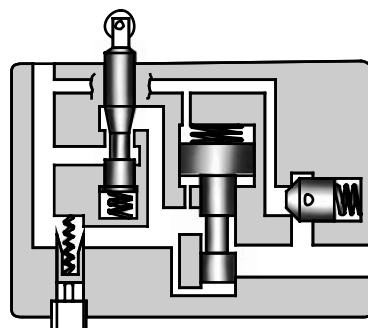

#### Specifications

| Model Numbers       | Max. Flow <sup>*1</sup><br>L/min<br>(U.S.GPM) | Metred Flow Range<br>L/min (U.S.GPM) |                       | Max. Reversed Free Flow<br>L/min<br>(U.S.GPM) | Max. Operating Pressure<br>MPa (PSI) | Approx. Mass<br>kg (lbs.) |
|---------------------|---|--------------------------------------|-----------------------|---|--------------------------------------|---------------------------|
|                     |   | Feed                                 | Fine Feed             |   |                                      |                           |
| UCF1G-01-4-A-* -11* | 16 [12]<br>(4.2 [3.2])                        | 0.03-4<br>(.008-1.06)                | —                     | 20<br>(5.3)                                   | 14<br>(2030)                         | 1.6<br>(3.5)              |
| UCF1G-01-4-B-* -11* | 12 [8]<br>(3.2 [2.1])                         |                                      |                       |   |                                      |                           |
| UCF1G-01-4-C-* -11* | 8 [4]<br>(2.1 [1.06])                         |                                      |                       |   |                                      |                           |
| UCF1G-01-8-A-* -11* | 20 [12]<br>(5.3 [3.2])                        | 0.03-8<br>(.008-2.1)                 | —                     |   |                                      |                           |
| UCF1G-01-8-B-* -11* | 16 [8]<br>(4.2 [2.1])                         |                                      |                       |   |                                      |                           |
| UCF1G-01-8-C-* -11* | 12 [4]<br>(3.2 [1.06])                        |                                      |                       |   |                                      |                           |
| UCF1G-03-4-* -10*   | 40 [40]<br>(10.6 [10.6])                      | 0.05-4<br>(.013-1.06)                | —                     | 40<br>(10.6)                                  | 2.6<br>(5.7)                         |                           |
| UCF1G-03-8-* -10*   |   | 0.05-8<br>(.013-2.1)                 | —                     |   |                                      |                           |
| UCF2G-03-4-* -10*   | 40 [40]<br>(10.6 [10.6])                      | 0.1-4<br>(.026-1.06)                 | 0.05-4<br>(.013-1.06) | 40<br>(10.6)                                  | 2.7<br>(6.0)                         |                           |
| UCF2G-03-8-* -10*   |   | 0.1-8<br>(.026-2.1)                  | 0.05-4<br>(.013-1.06) |   |                                      |                           |
| UCF1G-04-30-30*     | 80 [40]<br>(21.1 [10.6])                      | 0.1-22<br>(.026-5.8)                 | —                     | 80<br>(21.1)                                  | 6.5<br>(14.3)                        |                           |
| UCF2G-04-30-30*     |   | 0.1-22<br>(.026-5.8)                 | 0.1-17<br>(.026-4.5)  |   | 9.2<br>(20.3)                        |                           |

★ 1. The maximum flow rates are values with the deceleration valve and the flow control valve fully open. The values in [ ] are maximum flow rates with the deceleration valve fully open and the flow control valve fully closed.


★ 2. The values in [ ] are for pressures above 7 MPa (1020 PSI).

#### Model Number Designation


| F-   | UCF1                      | G                  | -01        | -4                                  | -A   | -E  | -11           | *                |
|--|---------------------------|--------------------|------------|-------------------------------------|--|---|---------------|------------------|
| Special Seals  | Series Number             | Type of Mounting   | Valve Size | Nominal Metred Flow L/min (U.S.GPM) | Deceleration Valve Max. Flow L/min (U.S.GPM) | Drain Connection                          | Design Number | Design Standards |
| F-: Special Seals for Phosphate Ester Type Fluids (Omit if not required) | UCF1: Single Feed Control | G: Gasket Mounting | 01         | 4: 4 (1.06)<br>8: 8 (2.1)           | A: 12 (3.2)<br>B: 8 (2.1)<br>C: 4 (1.06)     | None: Internal Drain<br>E: External Drain | 11            | Refer to ★ 1     |
|  |                           |                    | 03         | 4: 4 (1.06)<br>8: 8 (2.1)           | —  | 10  |               |                  |
|  |                           |                    | 04         | 30:30 (7.9)                         | —  | 30  |               |                  |
|  | UCF2: Double Feed Control | G: Gasket Mounting | 03         | 4: 4 (1.06)<br>8: 8 (2.1)           | —  | None: Internal Drain<br>E: External Drain | 10            |                  |
|  |                           |                    | 04         | 30:30 (7.9)                         | —  | None: External Drain                      | 30            |                  |

★ 1. Design Standards: None..... Japanese Standard "JIS" and European Design Standard  
90 ..... N. American Design Standard


### Graphic Symbols




UCF1G-01-\*




UCF1G-01-\*-E




UCF1G-03-\*



UCF1G-03-\*-E  
UCF1G-04



UCF2G-03-\*



UCF2G-03-\*-E  
UCF2G-04

## ■ Hydraulic Fluids

### ● Fluid Types

Any type of hydraulic fluids listed in the table below can be used.

|                         |   |
|-------------------------|---|
| Petroleum base oils     | Use fluids equivalent to ISO VG 32 or VG 46.  |
| Synthetic fluids        | Use phosphate ester or polyolester fluid. When phosphate ester fluid is used, prefix "F-" to the model number because the special seals (fluororubber) are required to be used. |
| Water containing fluids | Use water-glycol fluid.   |

Note: For use with hydraulic fluids other than those listed above, please consult your Yuken representatives in advance.

### ● Recommended Viscosity and Oil Temperatures

Viscosity ranging between 15 - 400 mm<sup>2</sup>/s (77 - 1800 SSU).

Oil temperatures between -15/+70°C (5 - 158°F).

Use hydraulic fluids which satisfy the recommended viscosity and oil temperatures given above.

### ● Control of Contamination

Due caution must be paid to maintaining control over contamination of the hydraulic fluids which may otherwise lead to breakdowns and shorten the life of the valves. Please maintain the degree of contamination within NAS 1638-Grade 12. Use 25 μm or finer line filter.

## ■ Attachment

### ● Mounting Bolts

| Valve<br>Model Numbers | Socket Head Cap Screw                      |                         | Qty. |
|------------------------|--|-------------------------|------|
|                        | Japanese Std. "JIS" & European Design Std. | N. American Design Std. |      |
| UCF1G-01               | M6 × 55 Lg.                                | 1/4-20 UNC × 2-1/4 Lg.  | 4    |
| UCF1G-03               | M6 × 55 Lg.                                | 1/4-20 UNC × 2-1/4 Lg.  | 4    |
| UCF2G-03               | M6 × 55 Lg.                                | 1/4-20 UNC × 2-1/4 Lg.  | 4    |
| UCF1G-04               | M10 × 70 Lg.                               | 3/8-16 UNC × 2-3/4 Lg.  | 4    |
| UCF2G-04               | M10 × 70 Lg.                               | 3/8-16 UNC × 2-3/4 Lg.  | 4    |

#### ■ Instructions

##### ● Allowable pressures at controlled flow outlet

If internal drain types of UCF1G-01 or 03 or UCF2G-03 are used, use them in metre-out circuits in order to limit the valve outlet pressure to the valves shown below. In addition, external drain types can also be used in metre-in circuits.

| Model Numbers       |              | Allowable Outlet Port Back Pres. MPa (PSI) |
|---------------------|--------------|--|
| Internal Drain Type | UCF1G-01-*   | 0.3 (44)                                   |
|                     | UCF1G-03-*   |  |
|                     | UCF2G-03-*   |  |
| External Drain Type | UCF1G-01-*-E | 14 (2030)                                  |
|                     | UCF1G-03-*-E |  |
|                     | UCF1G-04     |  |
|                     | UCF2G-03-*-E |  |
|                     | UCF2G-04     |  |

##### ● Minimum required pressure difference

The minimum pressure differential between inlet and outlet port is required to obtain the optimum pressure compensation. It varies accordingly to the flow rate to be set. For details, refer to the performance curve.

##### ● Spool push down level

Limit the spool push down level within the allowable maximum stroke range shown in the installation drawings.

##### ● Allowable drain port back pressure

Limit to 0.1 MPa (15 PSI).

In addition, connect the drain pipe independently and directly to the tank. (This applies only to external drain types.)

##### ● Required Force for Spool Push Down

| Model Numbers | Drain Type          | Force N (lbs.) |
|---------------|---------------------|----------------|
| UCF1G-01      | Internal drain type | 100 (22.5)     |
|               | External drain type | 80 (18.0)      |
| UCF1G-03      | Internal drain type | 170 (38.2)     |
|               | External drain type | 90 (20.2)      |
| UCF2G-03      | Internal drain type | 170 (38.2)     |
|               | External drain type | 130 (29.2)     |
| UCF1G-04      | External drain type | 170 (38.2)     |
| UCF2G-04      | External drain type | 170 (38.2)     |

Note: The push down forces are with the maximum allowable pressure at the port concerned, which is controlled flow outlet "B" for internal drain types or the drain port for internal drain types.

##### ● Line filter

To carry out flow adjustments by as small degree as 2 L/min (.53 U. S. GPM) or less, be sure to use a line filter, 10 or less, near the valve inlet.

##### ● Flow adjustment

[UCF1G-01, UCF\*G-03]

Loosen the locking screw and turn the flow adjustment dial clockwise for increase, and anti-clockwise for decrease.

The dial makes about 4 revolutions from zero to full flow and the valve opening is indicated on the revolution indicator.

After flow adjustment, tighten the locking screw.

[UCF\*G-04]

Loosen the locking screw and turn the flow adjustment handle clockwise to increase, and anti-clockwise to decrease.

Open condition is indicated in digital-scale in built-in revolution indicator.


After flow adjustment, tighten the locking screw.




### Performance Characteristics

#### ■ Min. Required Pressure Difference


**UCF1G-01**

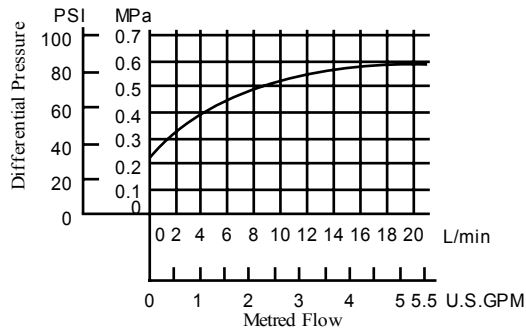


**UCF1G-03**

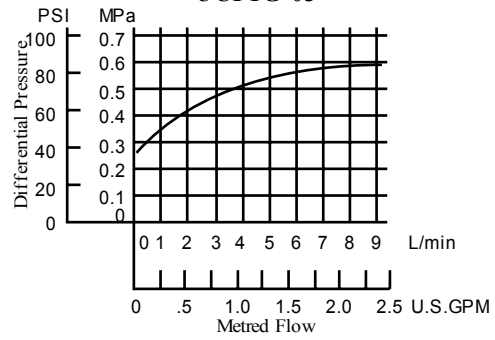


**UCF2G-03**

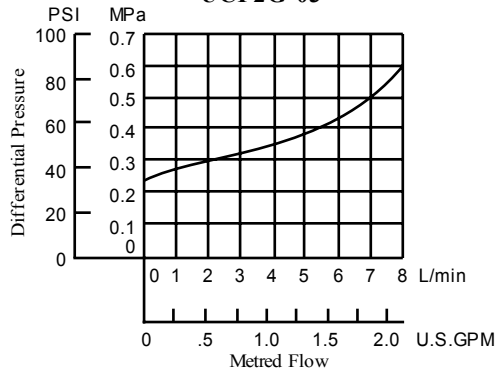

**UCF1G  
UCF2G -04**

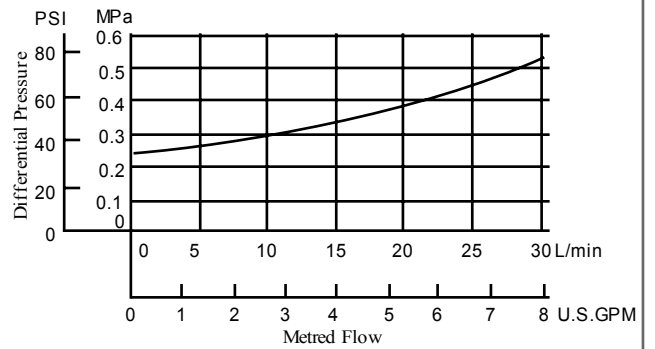


#### UCF1G-01-\*\*-\*\*-11/1190

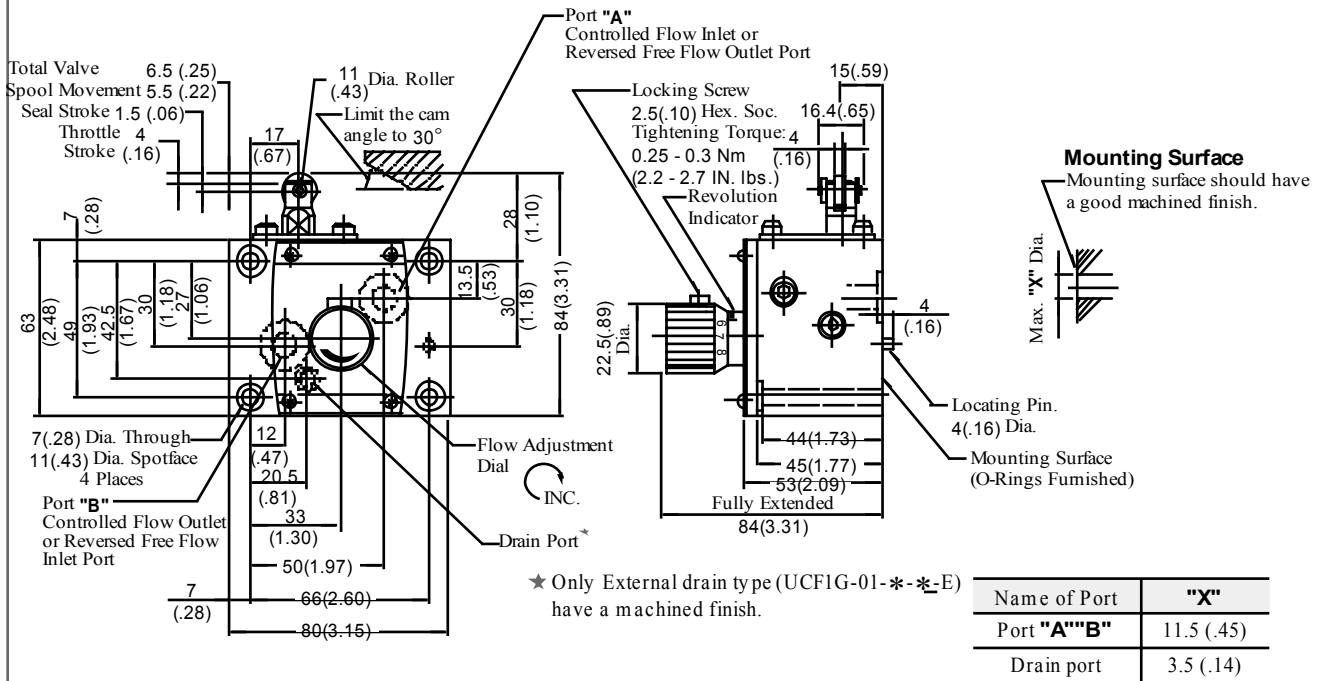


**DIMENSIONS IN  
MILLIMETRES (INCHES)**

#### UCF1G-03-\*\*-\*\*-10/1090

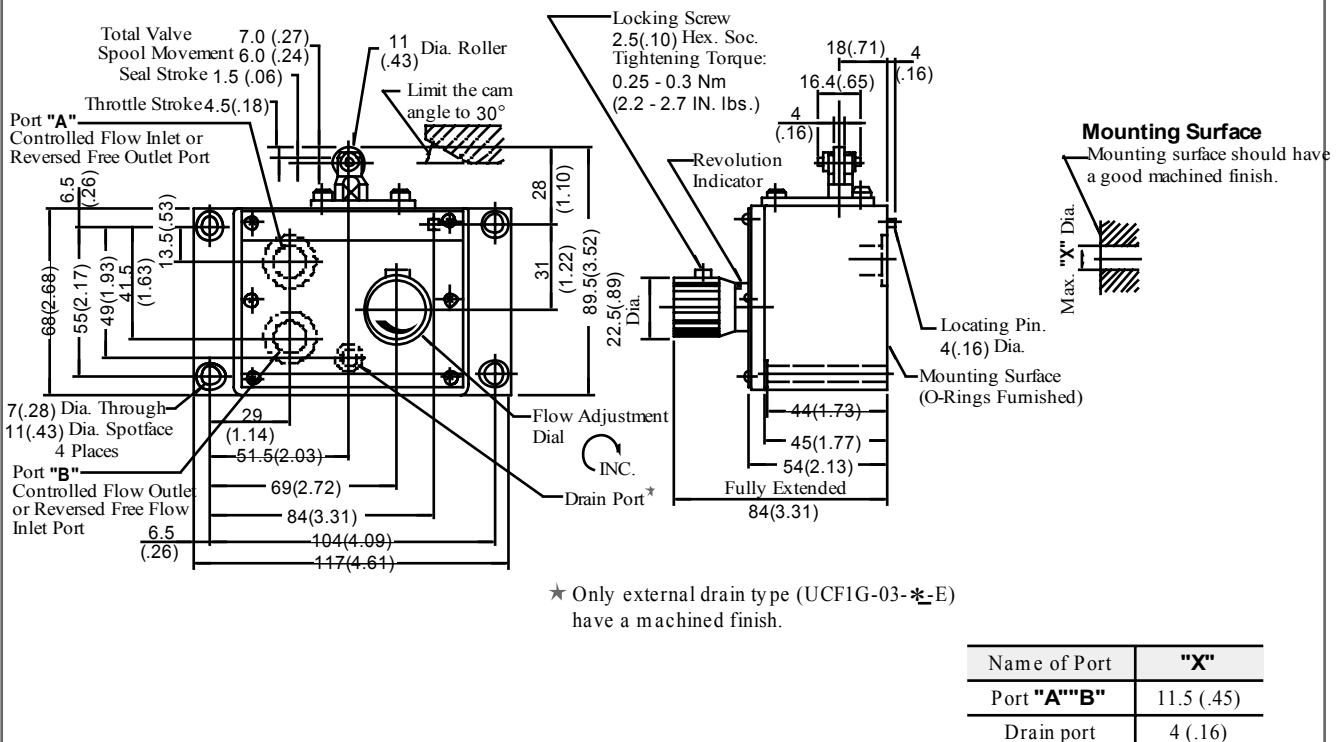

### Installation Drawings


UCF2G-03-\*\*-10/1090

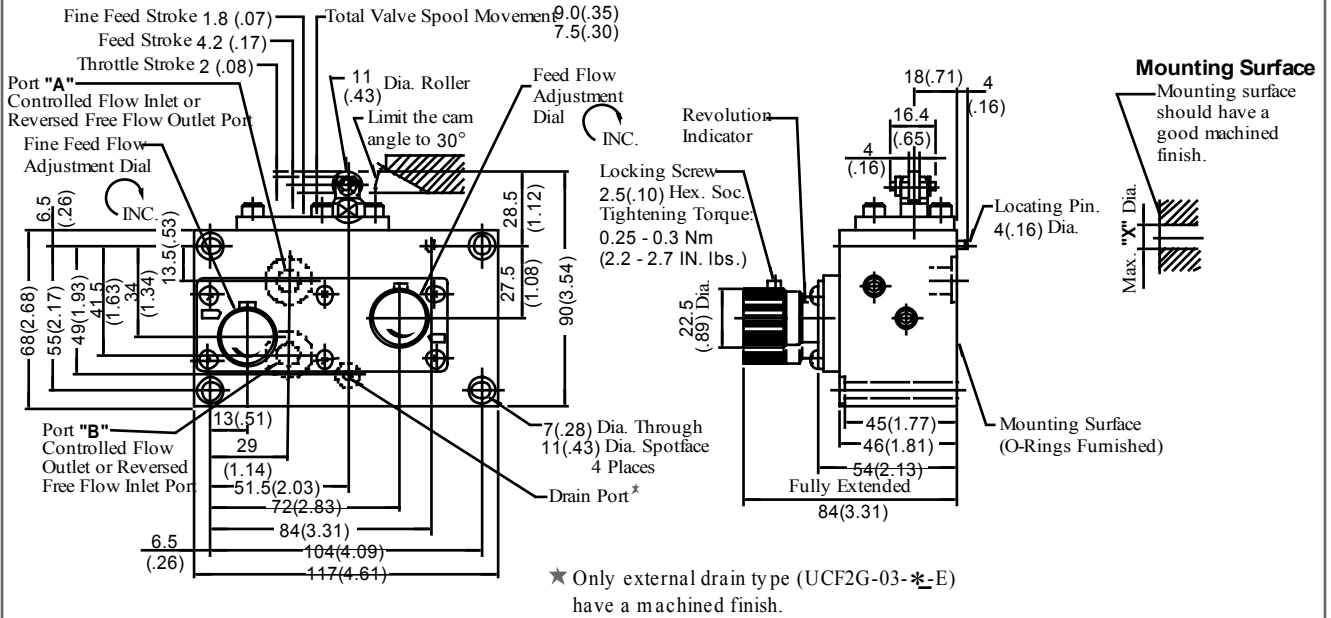

| Name of Port | "X"        |
|--------------|------------|
| Port "A""B"  | 11.5 (.45) |
| Drain port   | 4 (.16)    |

DIMENSIONS IN  
MILLIMETRES (INCHES)


UCF1G-04-30-30/3090

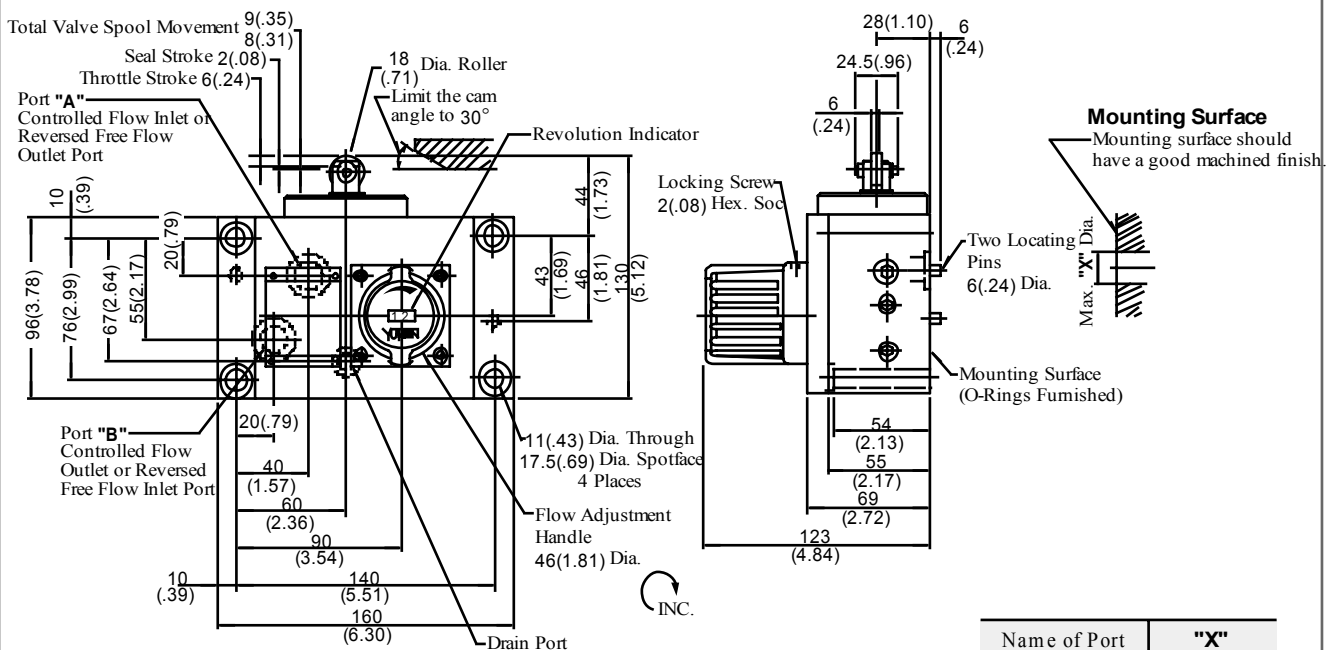

| Name of Port | "X"        |
|--------------|------------|
| Port "A""B"  | 15.5 (.61) |
| Drain port   | 8.5 (.33)  |

UCF2G-04-30-30/3090

DIMENSIONS IN  
MILLIMETRES (INCHES)

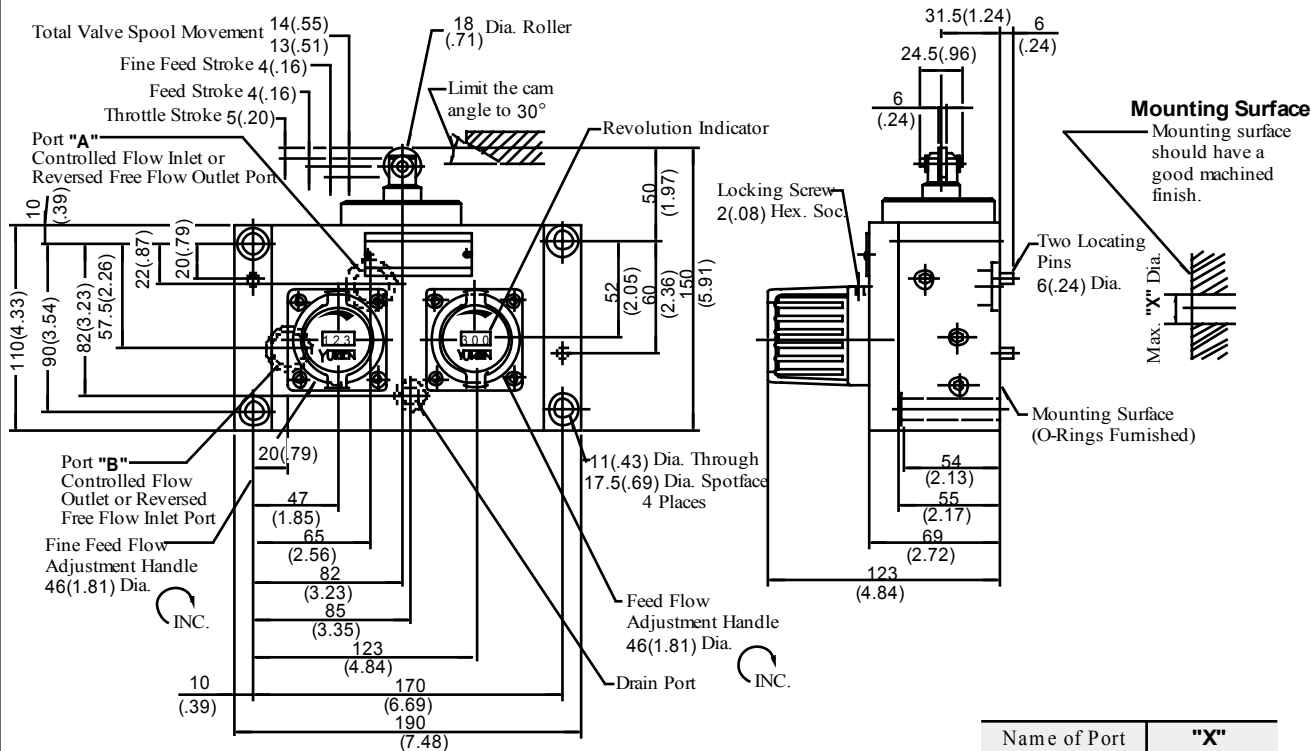


| Name of Port | "X"        |
|--------------|------------|
| Port "A"     | 18 (.71)   |
| Port "B"     | 15.5 (.61) |
| Drain port   | 8.5 (.33)  |

D

UCF1G-01-\*-\*-\*-11/1190

**CAUTION**

When making replacement of seals, please do it carefully after reading through the relevant instructions in the Operator's Manual.

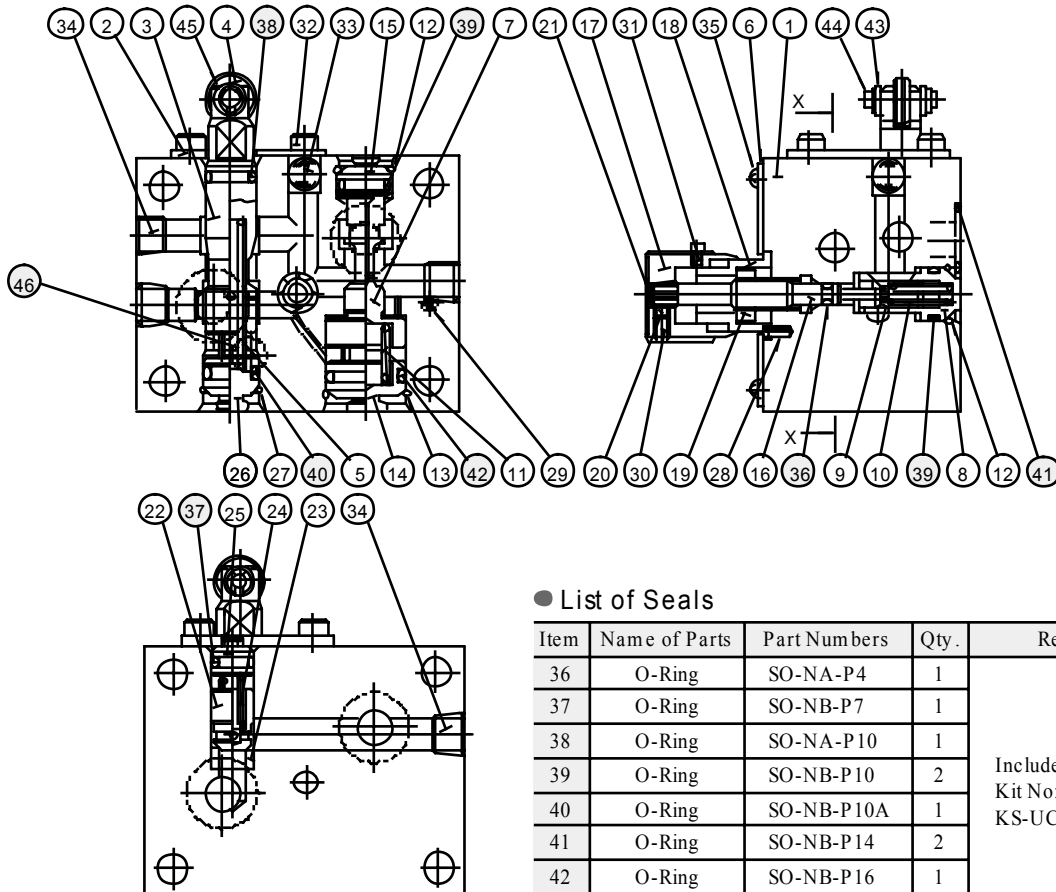

Section  
X-X

● List of Seals

| Item | Name of Parts | Part Numbers | Qty. | Remarks   |
|------|---------------|--------------|------|---|
| 36   | O-Ring        | SO-NA-P4     | 1    | Included in Seal Kit<br>Kit No:<br>KS-UCF1G-01-11 |
| 37   | O-Ring        | SO-NB-P7     | 1    |   |
| 38   | O-Ring        | SO-NA-P10    | 1    |   |
| 39   | O-Ring        | SO-NB-P10    | 2    |   |
| 40   | O-Ring        | SO-NB-P10A   | 1    |   |
| 41   | O-Ring        | SO-NB-P14    | 2    |   |
| 42   | O-Ring        | SO-NB-P16    | 1    |   |
| 46   | O-Ring        | SO-NB-P5     | 1*   |   |



★Used only for external drain types (UCF1G-01-\*-\*-\*-E-11).



UCF1G-03-\*-\*\*-10/1090

**CAUTION**

When making replacement of seals, please do it carefully after reading through the relevant instructions in the Operator's Manual.

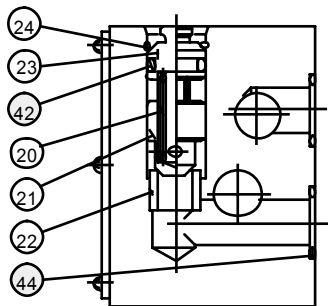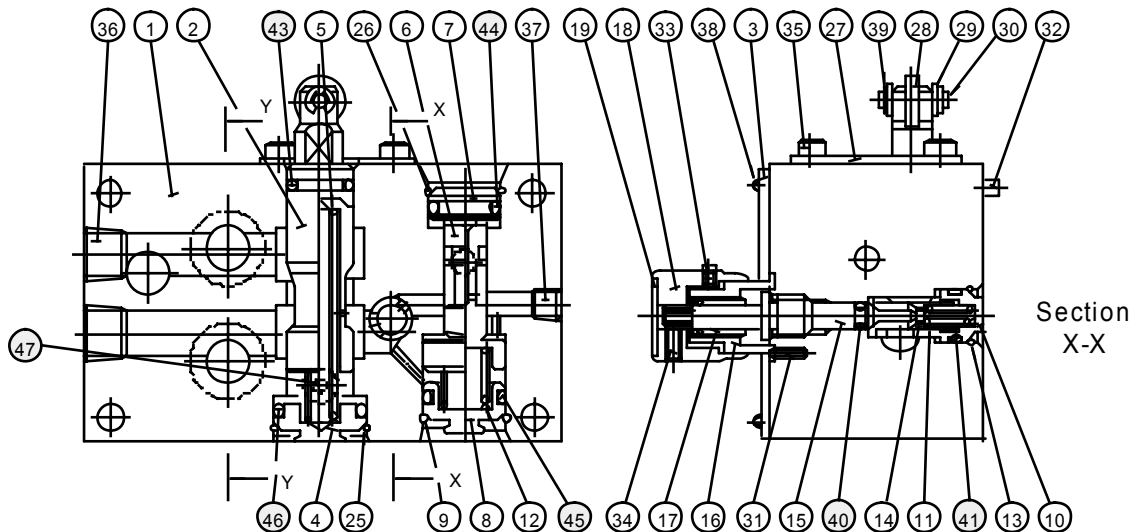

Section  
Y-Y

● List of Seals

| Item | Name of Parts | Part Numbers | Qty. | Remarks   |
|------|---------------|--------------|------|---|
| 40   | O-Ring        | SO-NA-P4     | 1    | Included in Seal Kit<br>Kit No:<br>KS-UCF1G-03-10 |
| 41   | O-Ring        | SO-NB-P10    | 1    |   |
| 42   | O-Ring        | SO-NB-P10A   | 1    |   |
| 43   | O-Ring        | SO-NA-P12    | 1    |   |
| 44   | O-Ring        | SO-NB-P14    | 3    |   |
| 45   | O-Ring        | SO-NB-P16    | 1    |   |
| 46   | O-Ring        | SO-NB-P18    | 1    |   |
| 47   | O-Ring        | SO-NA-P6     | 1*   |   |



★ Used only for external drain types (UCF1G-03-\*-E-10).



UCF2G-03-\*-\*\*-10/1090

#### CAUTION

When making replacement of seals, please do it carefully after reading through the relevant instructions in the Operator's Manual.

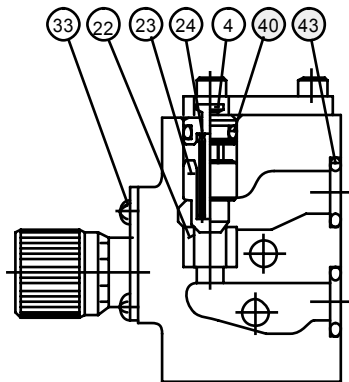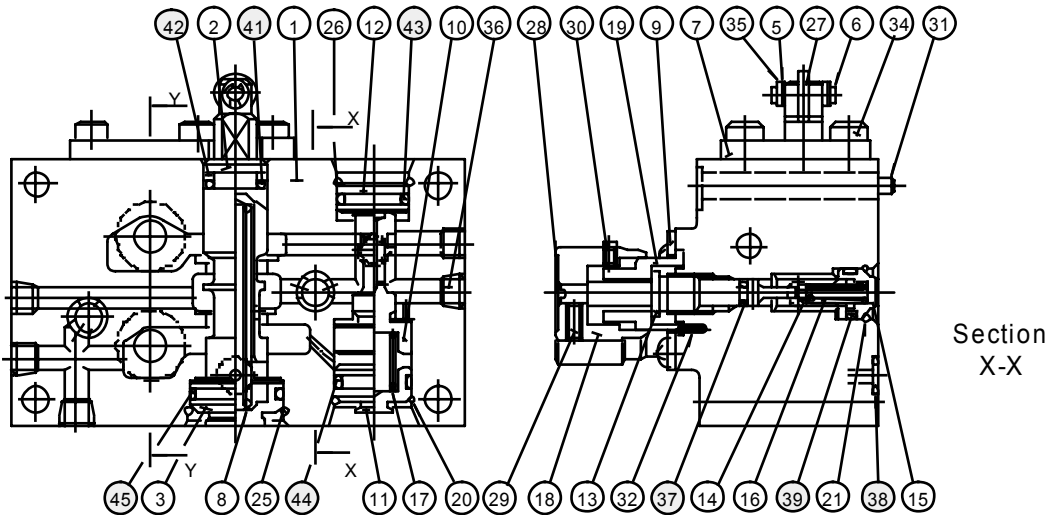

Section  
Y-Y

#### ● List of Seals

| Item | Name of Parts | Part Numbers | Qty.            |
|------|---------------|--------------|-----------------|
| 37   | O-Ring        | SO-NA-P4     | 2               |
| 38   | O-Ring        | SO-NB-P6     | 1 <sup>★1</sup> |
| 39   | O-Ring        | SO-NB-P10    | 2               |
| 40   | O-Ring        | SO-NB-P10A   | 1               |
| 41   | O-Ring        | SO-NA-P12    | 1               |
| 42   | Back Up Ring  | SO-BB-P12    | 1 <sup>★2</sup> |
| 43   | O-Ring        | SO-NB-P14    | 3               |
| 44   | O-Ring        | SO-NB-P16    | 1               |
| 45   | O-Ring        | SO-NB-P21    | 1               |

★1. Used only for external drain types (UCF2G-03-\*-E-10\*).

★2. Used only for internal drain types (UCF2G-03-\*-10\*).

Note: When ordering the seals, please specify the seal kit number from the table left.

#### ● List of Seal Kits



| Model Numbers   | Seal Kit Numbers |
|-----------------|------------------|
| UCF2G-03-*-10*  | KS-UCF2G-03-10   |
| UCF2G-03-*-E-10 | KS-UCF2G-03-E-10 |

UCF1G-04-30-30/3090

UCF2G-04-30-30/3090

**CAUTION**

When making replacement of seals, please do it carefully after reading through the relevant instructions in the Operator's Manual.

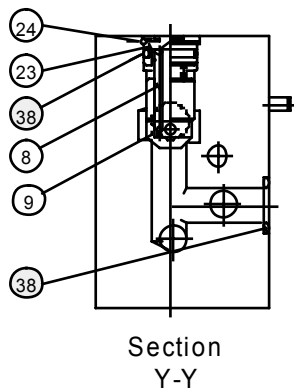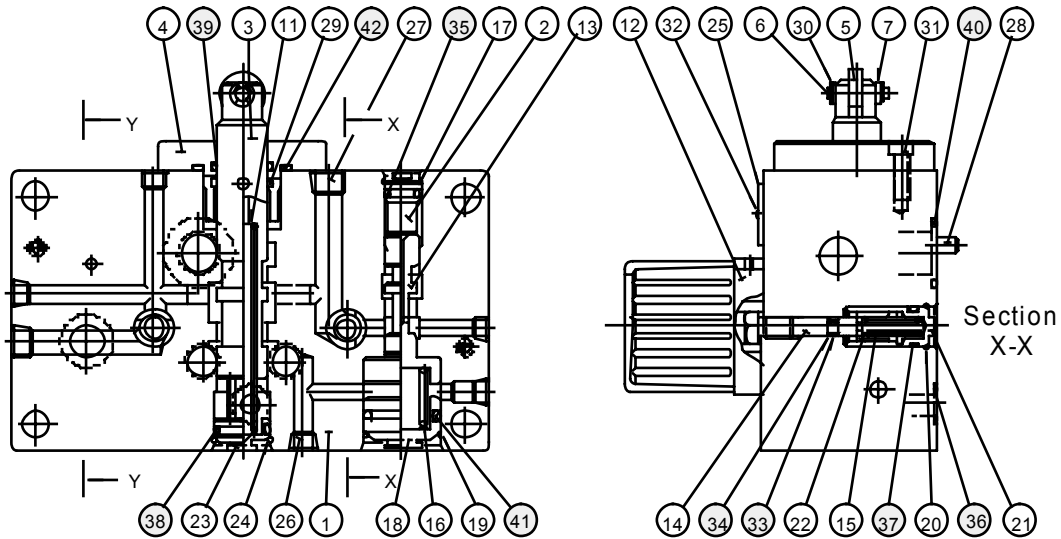

● List of Seals

| Item | Name of Parts | Part Numbers | Quantity |       |
|------|---------------|--------------|----------|-------|
|      |               |              | UCF1G    | UCF2G |
| 33   | O-Ring        | SO-NA-P4     | 1        | 2     |
| 34   | Back Up Ring  | SO-BB-P4     | 1        | 2     |
| 35   | O-Ring        | SO-NB-P14    | 1        | —     |
|      |               | SO-NB-P10A   | —        | 1     |
| 36   | O-Ring        | SO-NB-P11    | 1        | 1     |
| 37   | O-Ring        | SO-NB-P12    | 1        | 2     |
| 38   | O-Ring        | SO-NB-P18    | 3        | 3     |
| 39   | O-Ring        | SO-NA-P20    | 1        | 1     |
| 40   | O-Ring        | SO-NB-P18    | 1        | —     |
|      |               | SO-NB-P22A   | —        | 1     |
| 41   | O-Ring        | SO-NB-G25    | 1        | 1     |
| 42   | O-Ring        | SO-NB-P34    | 1        | 1     |

● List of Seal Kits

| Model Numbers | Seal Kit Numbers |
|---------------|------------------|
| UCF1G-04      | KS-UCF1G-04-30   |
| UCF2G-04      | KS-UCF2G-04-30   |

Note: When ordering the seals, please specify the seal kit number from the table left.

